


HERZ-Motorised flow controller

Pressure Independant Balancing Control Valve



Data sheet 4206, Issue 0717

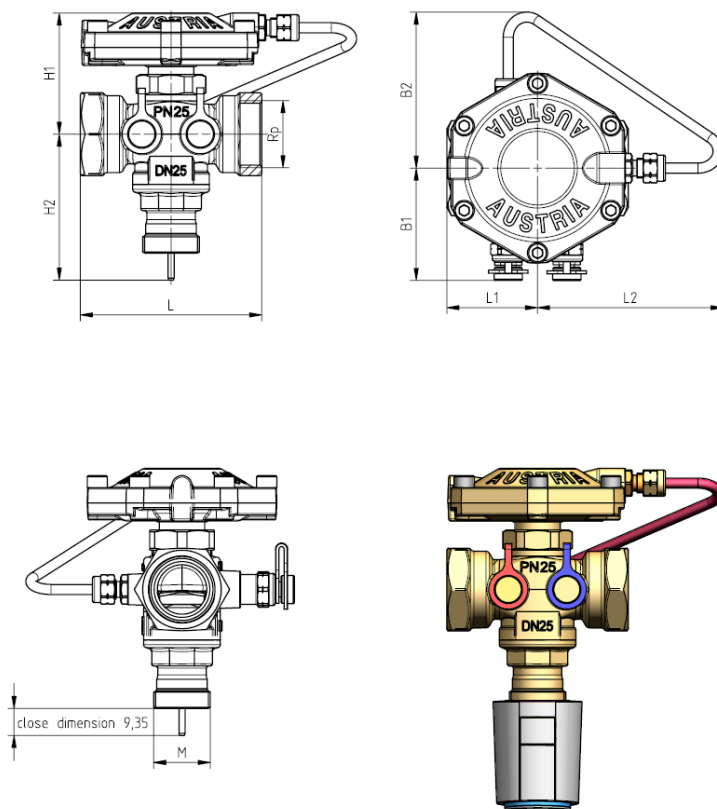

	Order no:	DN	G	L	H1	H2	H2+Actuator	B1	B2	L1	L2	M
with test points.	1 4206 11	15	½	66	59	73	134	49	63	48	81	28 x 1.5
	1 4206 12	20	¾	76	60	73	134	51	68.5	48	85	28 x 1.5
	1 4206 13	25	1	76	60	73	134	51	68.5	48	85	28 x 1.5
	1 4206 14	32	1 ¼	114	76	86	144	76	47	57	89	28 x 1.5
	1 4206 15	40	1 ½	132	86	95	156	75	47	70	81	28 x 1.5
	1 4206 16	50	2	140	86	95	156	75	47	70	81	28 x 1.5
without test points.	1 4206 41	15	½	66	59	73	134	49	63	48	81	28 x 1.5
	1 4206 42	20	¾	76	60	73	134	51	68.5	48	85	28 x 1.5
	1 4206 43	25	1	76	60	73	134	51	68.5	48	85	28 x 1.5
	1 4206 44	32	1 ¼	114	76	86	144	76	47	57	89	28 x 1.5
	1 4206 45	40	1 ½	132	86	95	156	75	47	70	81	28 x 1.5
	1 4206 46	50	2	140	86	95	156	75	47	70	81	28 x 1.5

Technical data

Max. operating pressure	25 bar
Max. differential pressure on the body	6 bar
Min. operating temperature	2 °C (pure water)
Min. operating temperature	- 20 °C (frost protection)
Max. operating temperature	up to DN 32 130 °C from DN 40 110 °C
Lift	4 mm

The integrated control unit together with the actuating drive is responsible for modular control. Various actuating drives might be used. Integrated DP controller gives the control valve 100% authority.

All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.

Materials

Body: dezincification-resistant brass

Membranes and O-rings: EPDM

Water purity in accordance with the ÖNORM H 5195 and VDI 2035 standards

Ethylene and propylene glycol can be mixed to a ratio of 25 - 50 vol. [%].

Application

The Pressure Independent Balancing Control Valve (PIBCV) is used in all heating and cooling systems with circulation pumps. The valve automatically maintains flow to the required part of the system at the set rate by measuring and immediately adjusting to any variation in pressure. No additional measurements are necessary and the correct flow rate is achieved at all operating conditions. The diaphragm responds to the pressure upstream and downstream of the regulating valve (via an internal impulse line). The valve settings directly affect the volumetric flow through the valve. It is thus possible to set the maximum flow rate based on the flow chart when the valve is fitted. This allows for the balancing of heating circuits, cooling water systems, ceiling cooling and heating panels, air heaters, etc. without any need to first assess the pressure variations in the system. The valve's principal application is as a control valve for terminal units. As it is pressure independent, it maximizes energy efficiency and negates the requirement for DP control valves. In addition to the PIBCV, HERZ Ball Valves (2190) can be fitted in the corresponding flow pipe. If control measurements of the flow rate are required, then Herz metering stations (4000) or STRÖMAX-M valves (4017 M, 4 117 M, 4217 GM) must be fitted instead.


Installation

The valve is fitted in the return in any orientation. The arrow on the valve body should align with the direction of flow.

It is recommended that an isolation valve is fitted both upstream and downstream of the PIBCV.

The PIBCV may be isolated using the HERZ pre-setting key (1 4006 02).

For pre-setting, turn the key right (clockwise) up to the stop. The setting should then read < 0%.

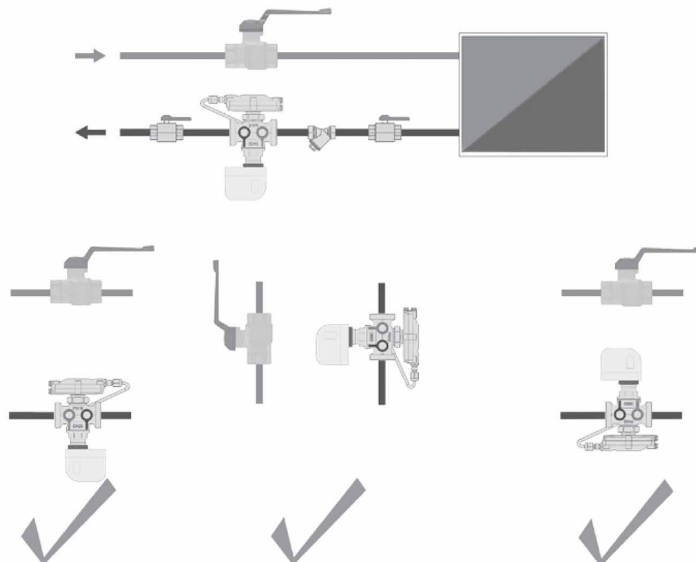

kvs-values

DN 15	0.4 m ³ /h	DN 32	2.5 m ³ /h
DN 20	0.9 m ³ /h	DN 40	5 m ³ /h
DN 25	1.9 m ³ /h	DN 50	5 m ³ /h

All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.

Tips


The valves must be installed for the correct application using clean fittings. A HERZ strainer (4111) should be fitted to prevent impurities.

Test points

Two test points are fitted on the same side of the valve and factory sealed. Thanks to this arrangement they are easily accessible and measurement devices can be quickly fitted, no matter in what position the valve has been installed.

Pre-setting

The valve setting is clearly shown in percent. The pre-set value can be easily adjusted. The pre-set PIBCV can be isolated at any 2me or adjusted to the required flow rate.



1 4006 02


Accessories and Spare Parts

- 1 4117 .. HERZ-STRÖMAX circuit control valves, angle version
- 1 4217 .. HERZ- STRÖMAX circuit control valves, straight version
- 1 4017 .. HERZ- STRÖMAX circuit control valves with integrated metering orifice plate
- 1 4125 .. HERZ shut-off valves, angle version
- 1 4115 .. HERZ shut-off valves, angle version
- 1 4215 .. HERZ shut-off valves, straight version, also variants with male threads. For details please refer to the corresponding data sheets.
- 1 0284 01 test point for HERZ circuit control valve, blue cap (return)
- 1 0284 02 test point for HERZ circuit control valve, red cap (flow)
- 1 0284 11 test point for HERZ circuit control valve, extended model, blue cap (return) 1 0284 12 test point for HERZ circuit control valve, extended model, red cap (flow) 1 0284 21 HERZ test point with draining function, blue cap (return)
- 1 0284 22 HERZ test point with draining function, red cap (flow)
- 1 0284 00 test point adapter set
- 1 7708 .. HERZ actuating drive for two-point or pulse control
- 1 7990 .. HERZ actuating drive for continuous control
- 1 0273 09 screw plug 1/4


☑ Application examples

Fan coil system with variable speed pump

Two-point control

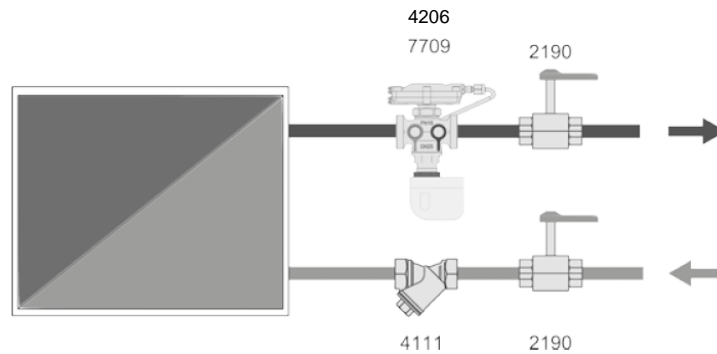


Modulating control

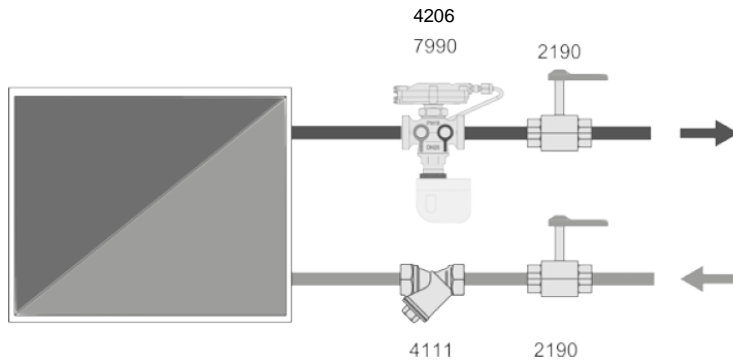


Fan coil system with constant-speed pump


Two-point control

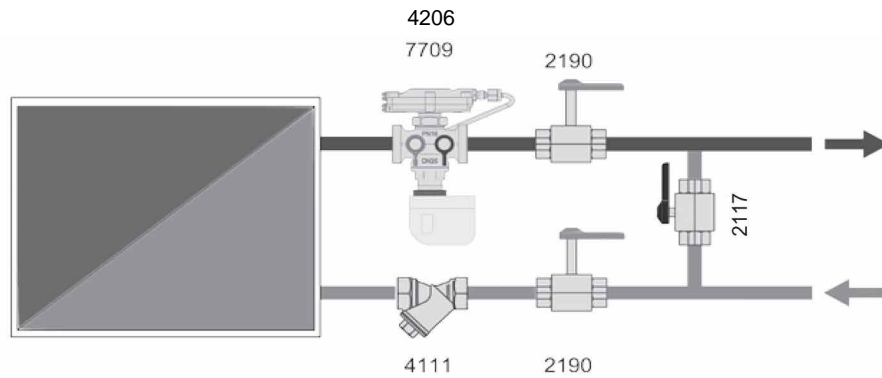


Modulating control

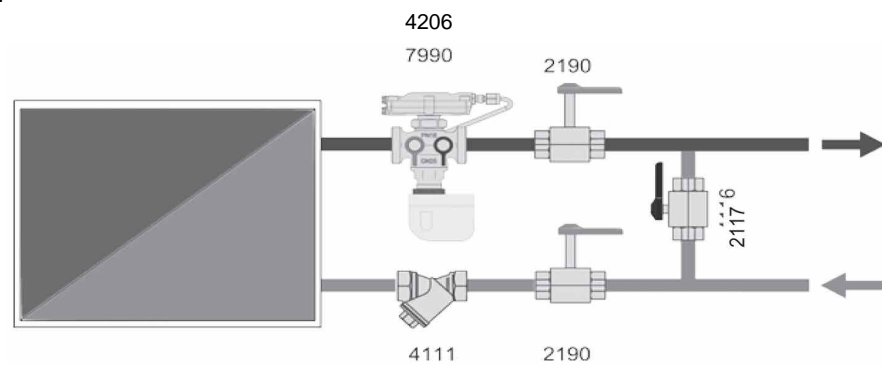


All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.

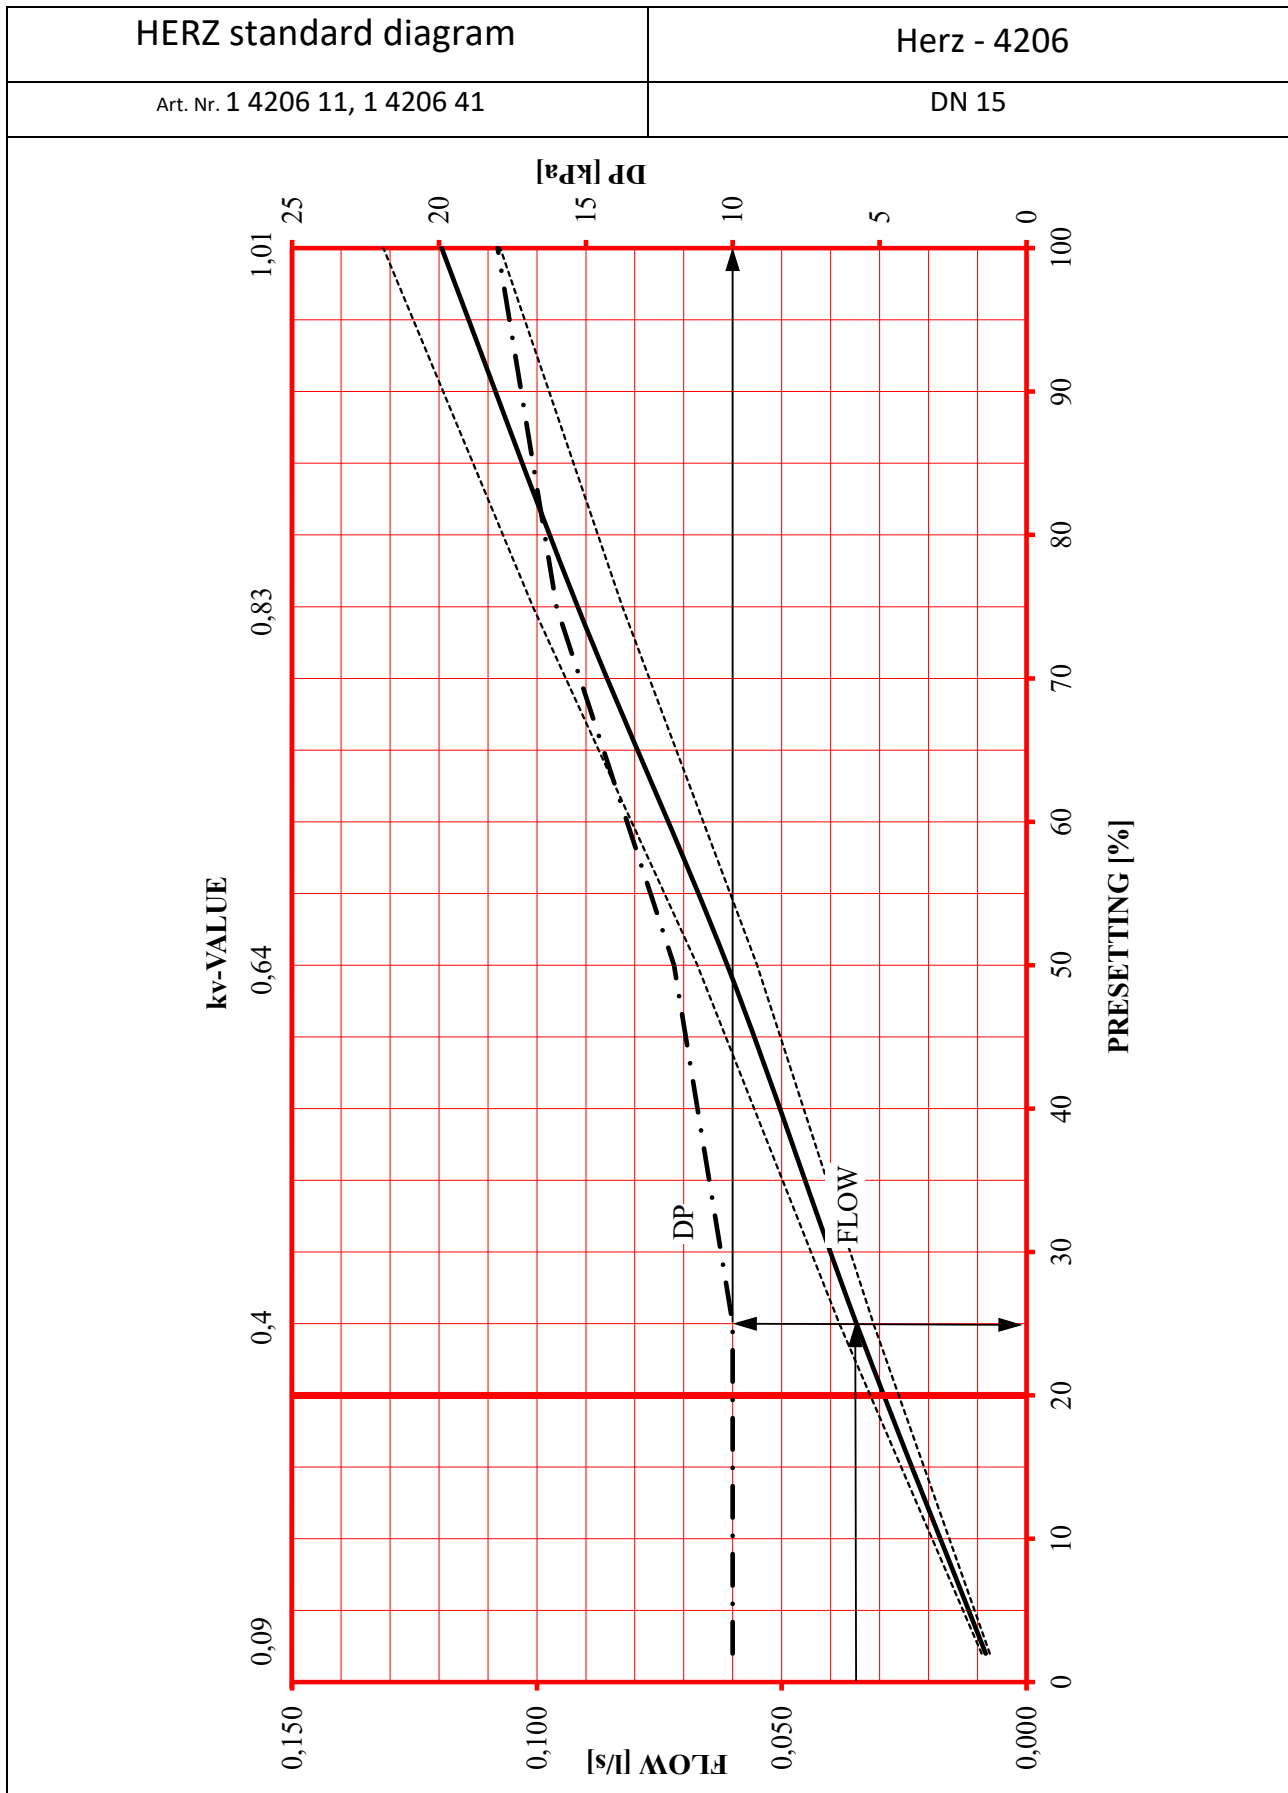


All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.

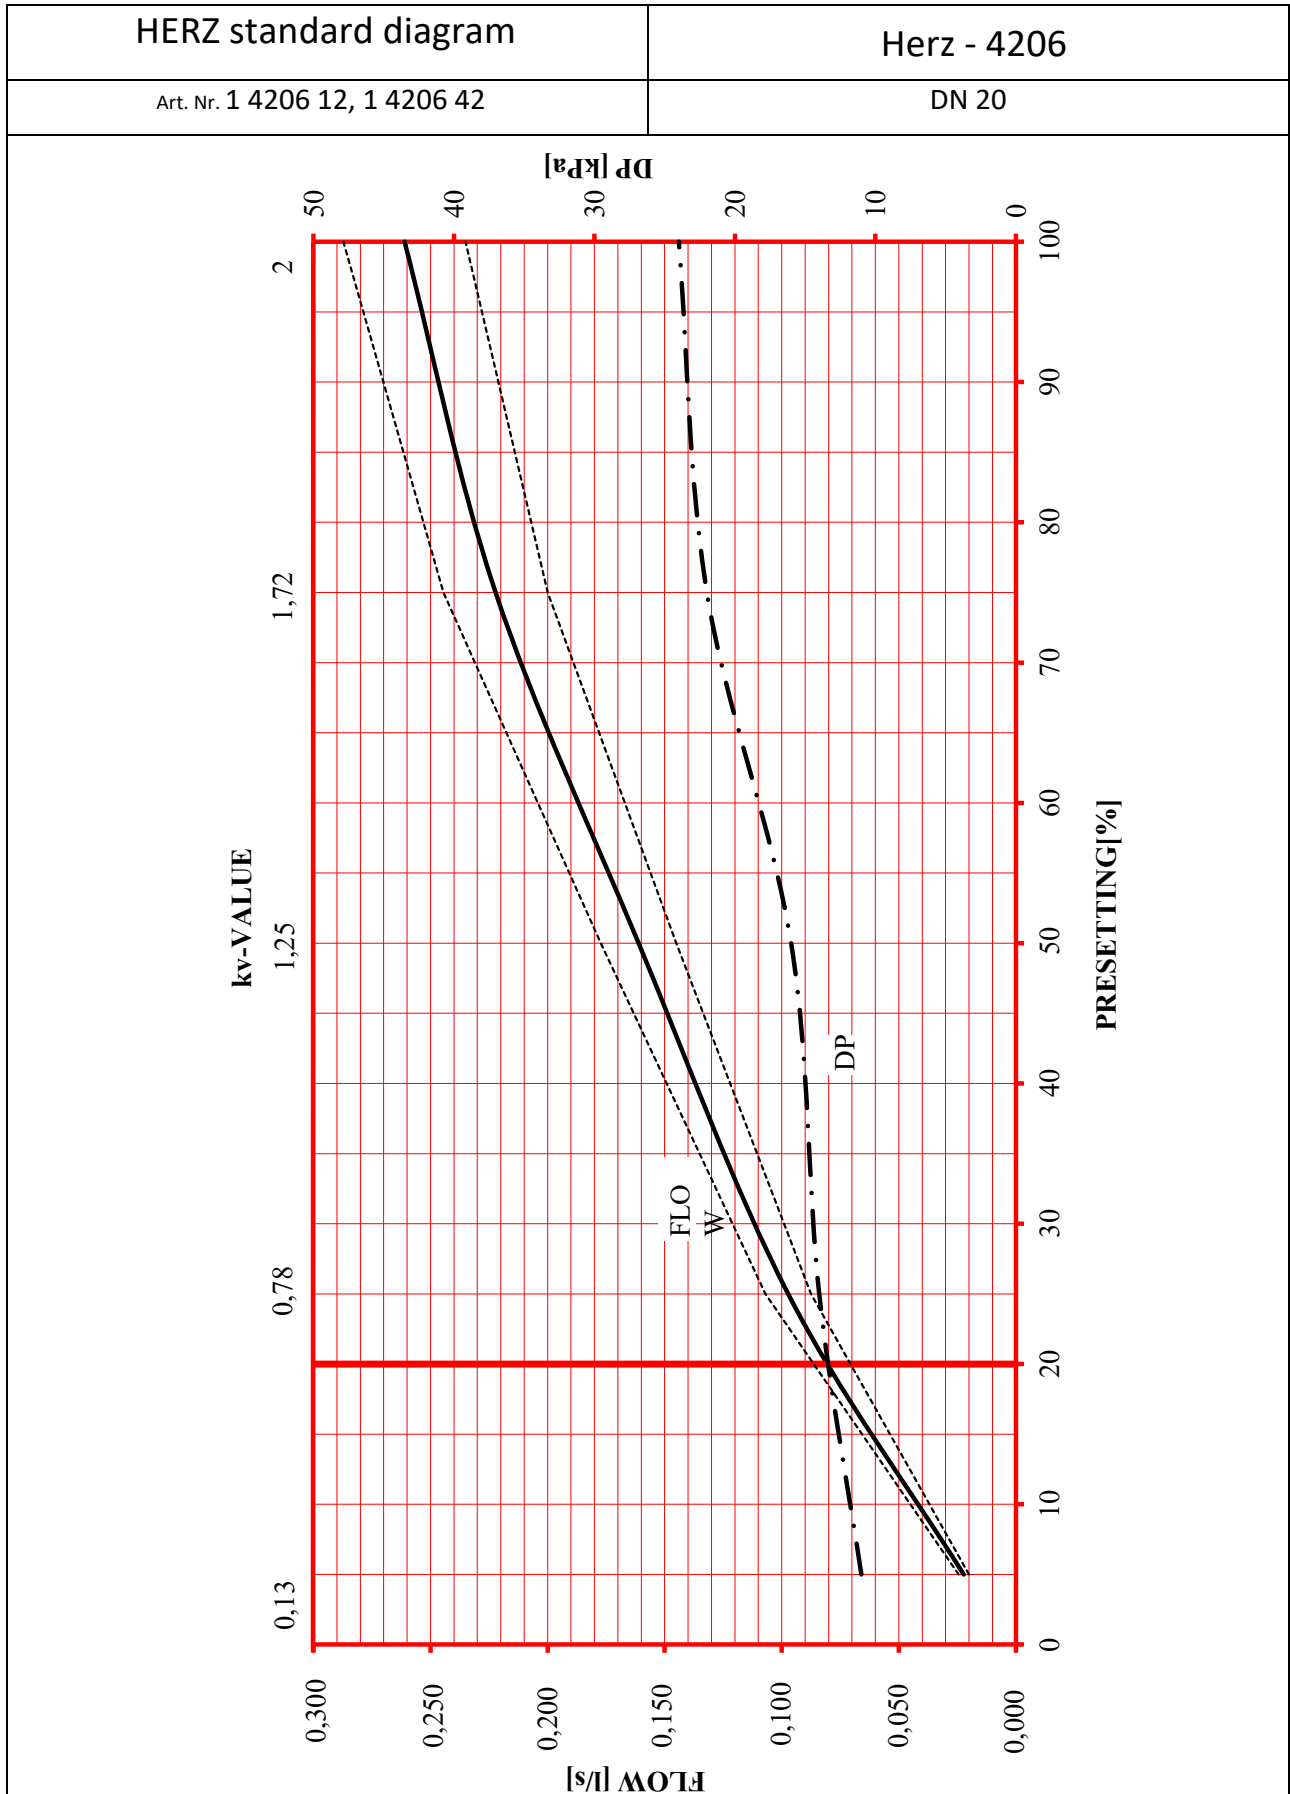


All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.

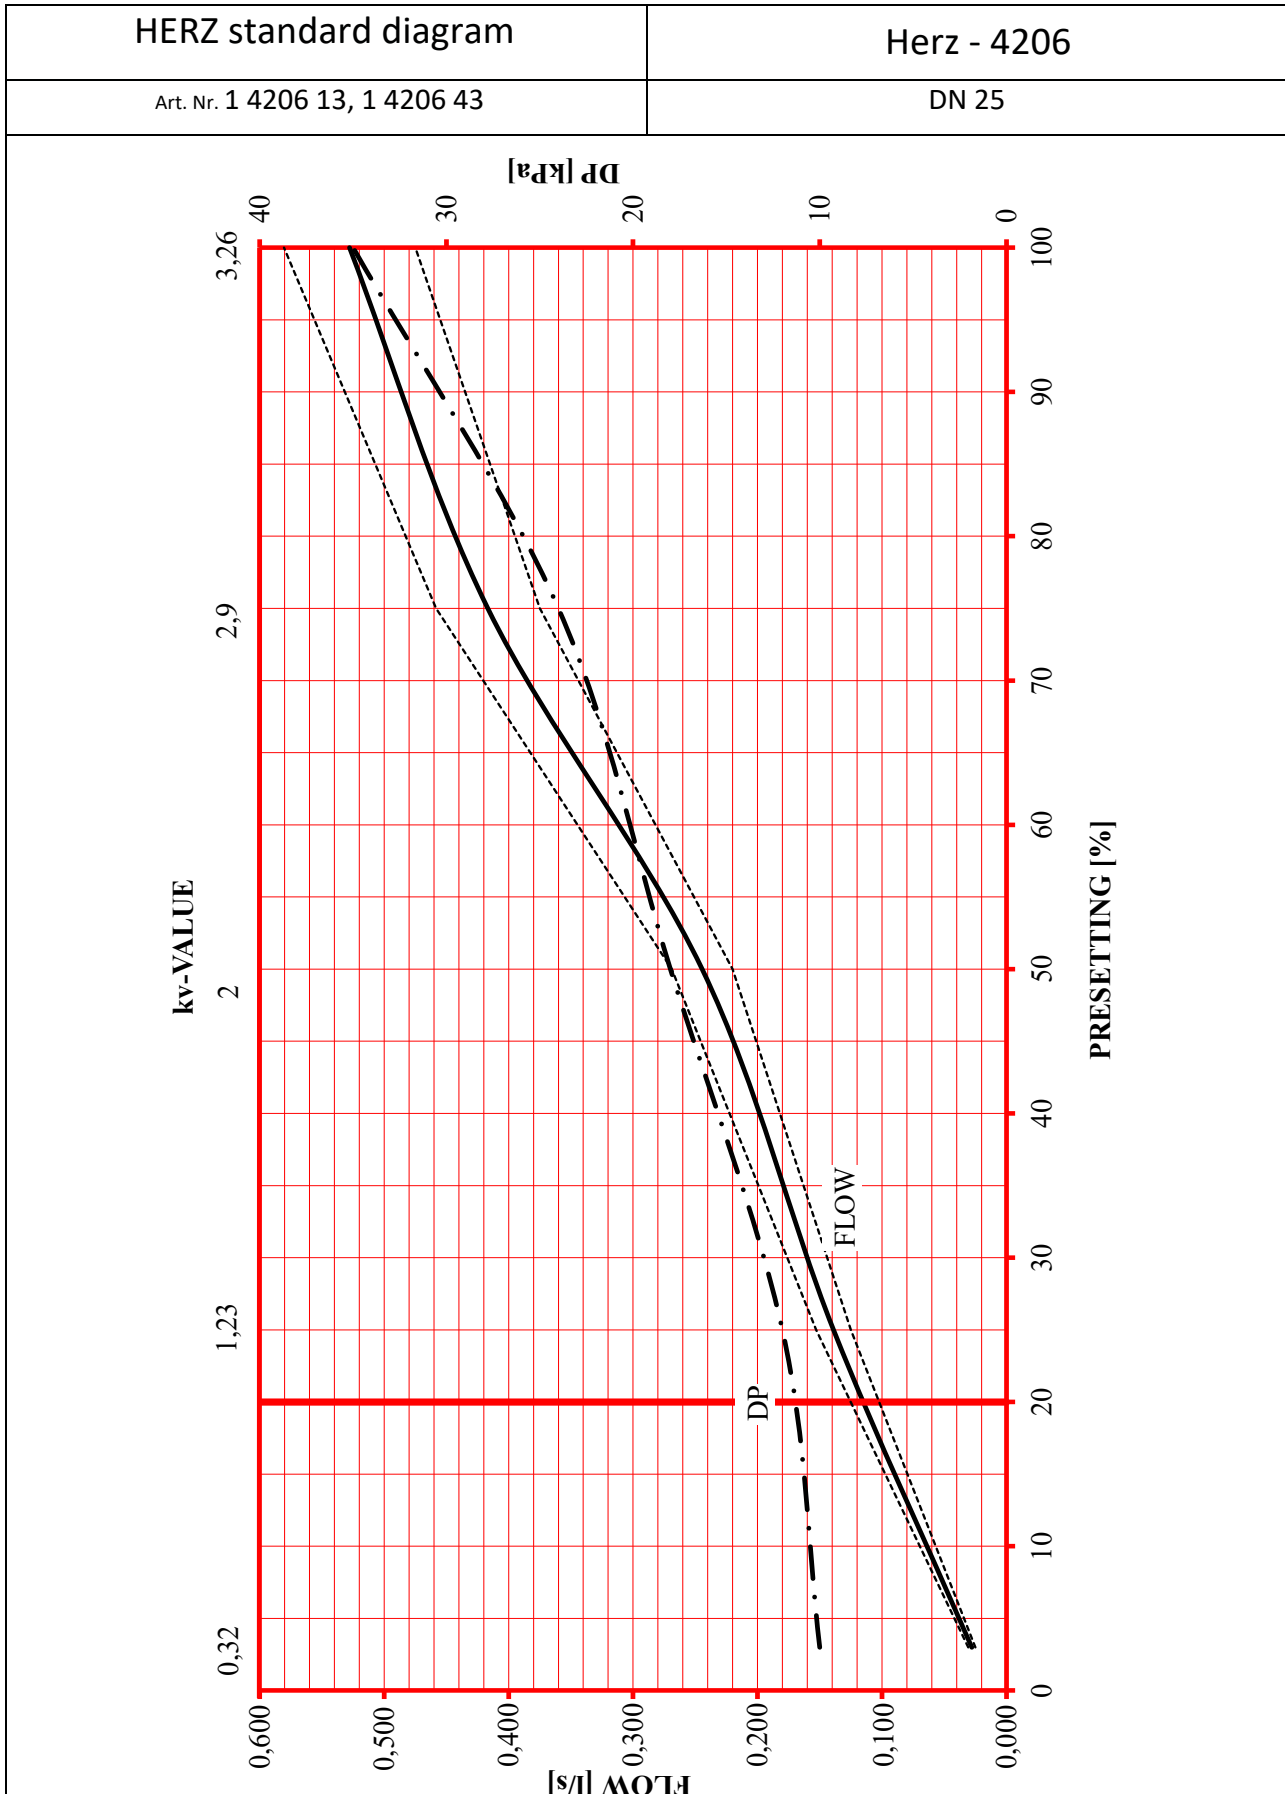


All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.

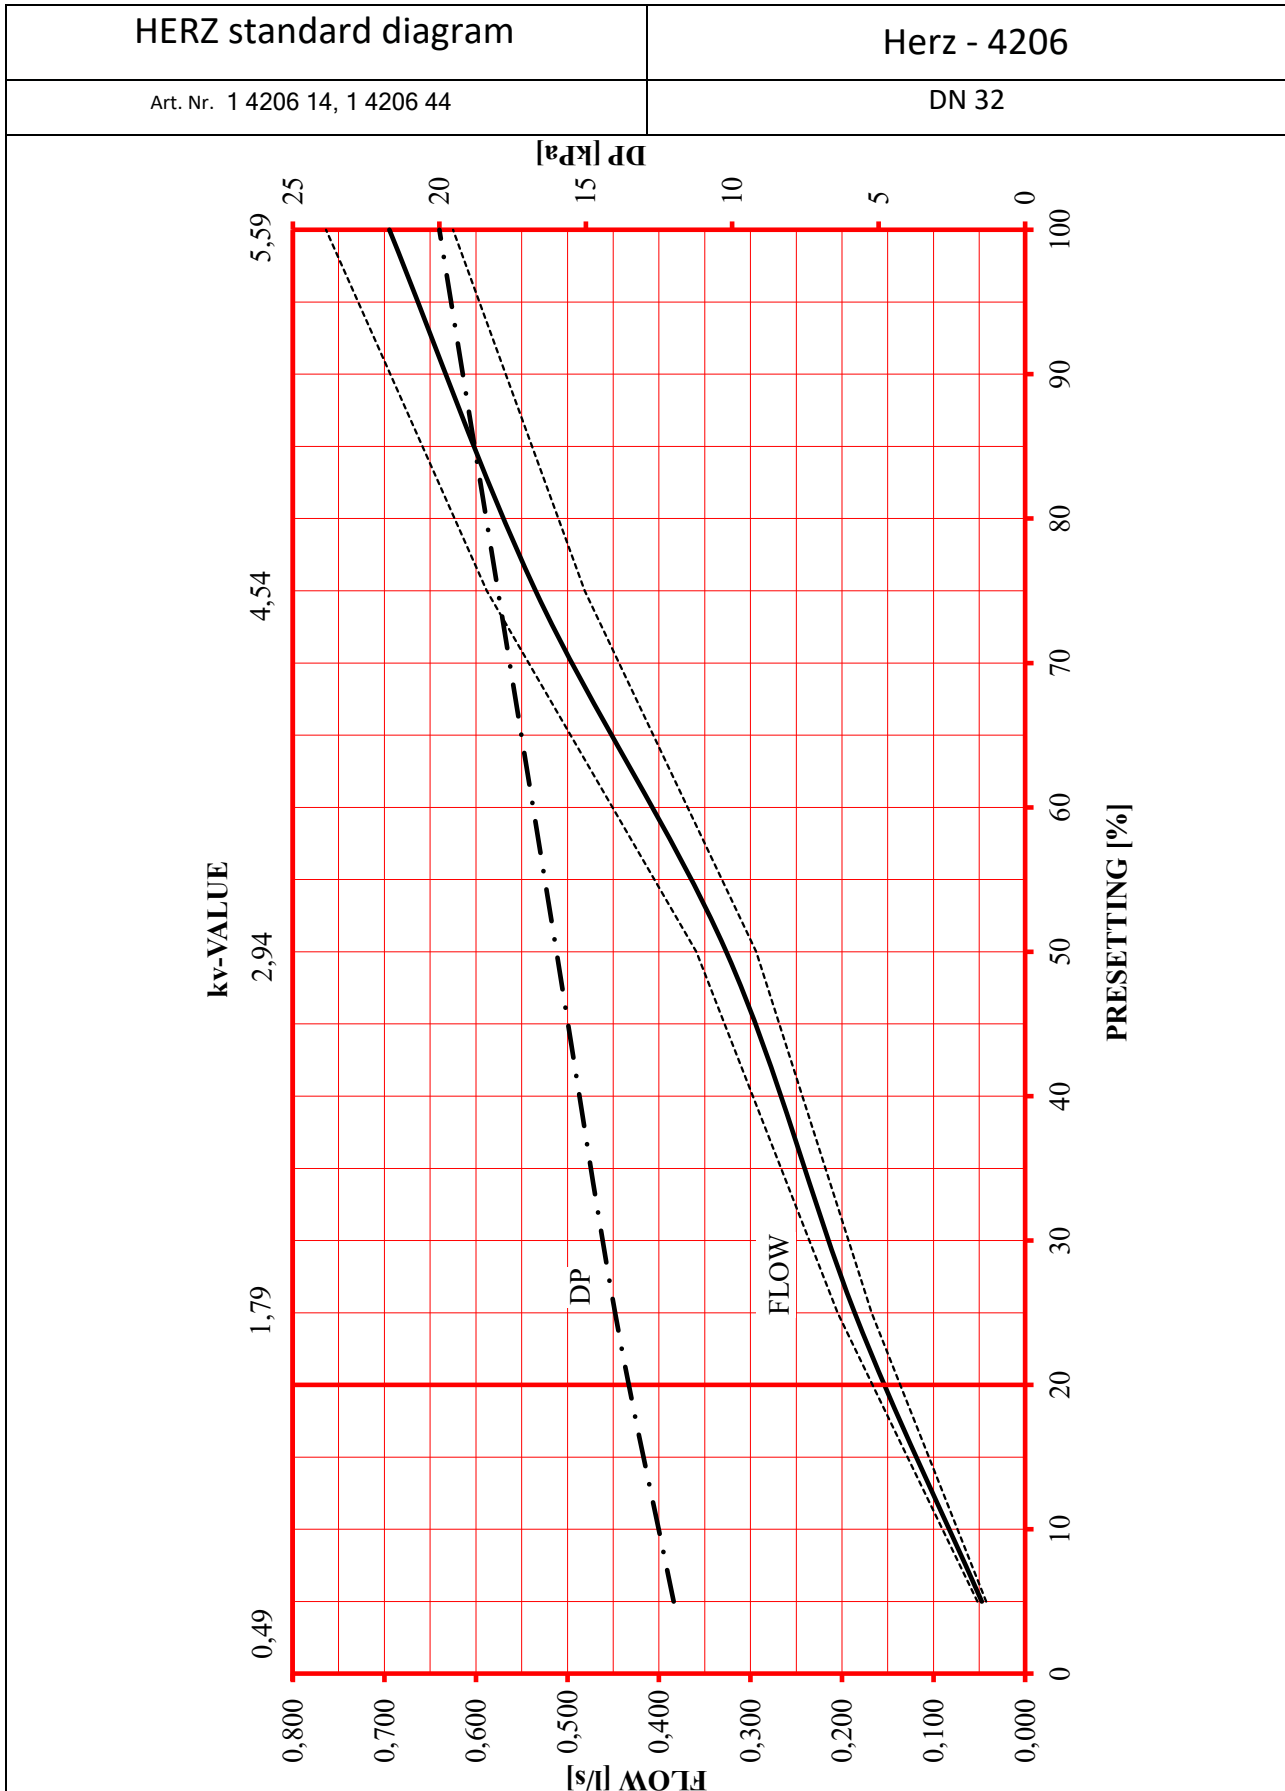

All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.

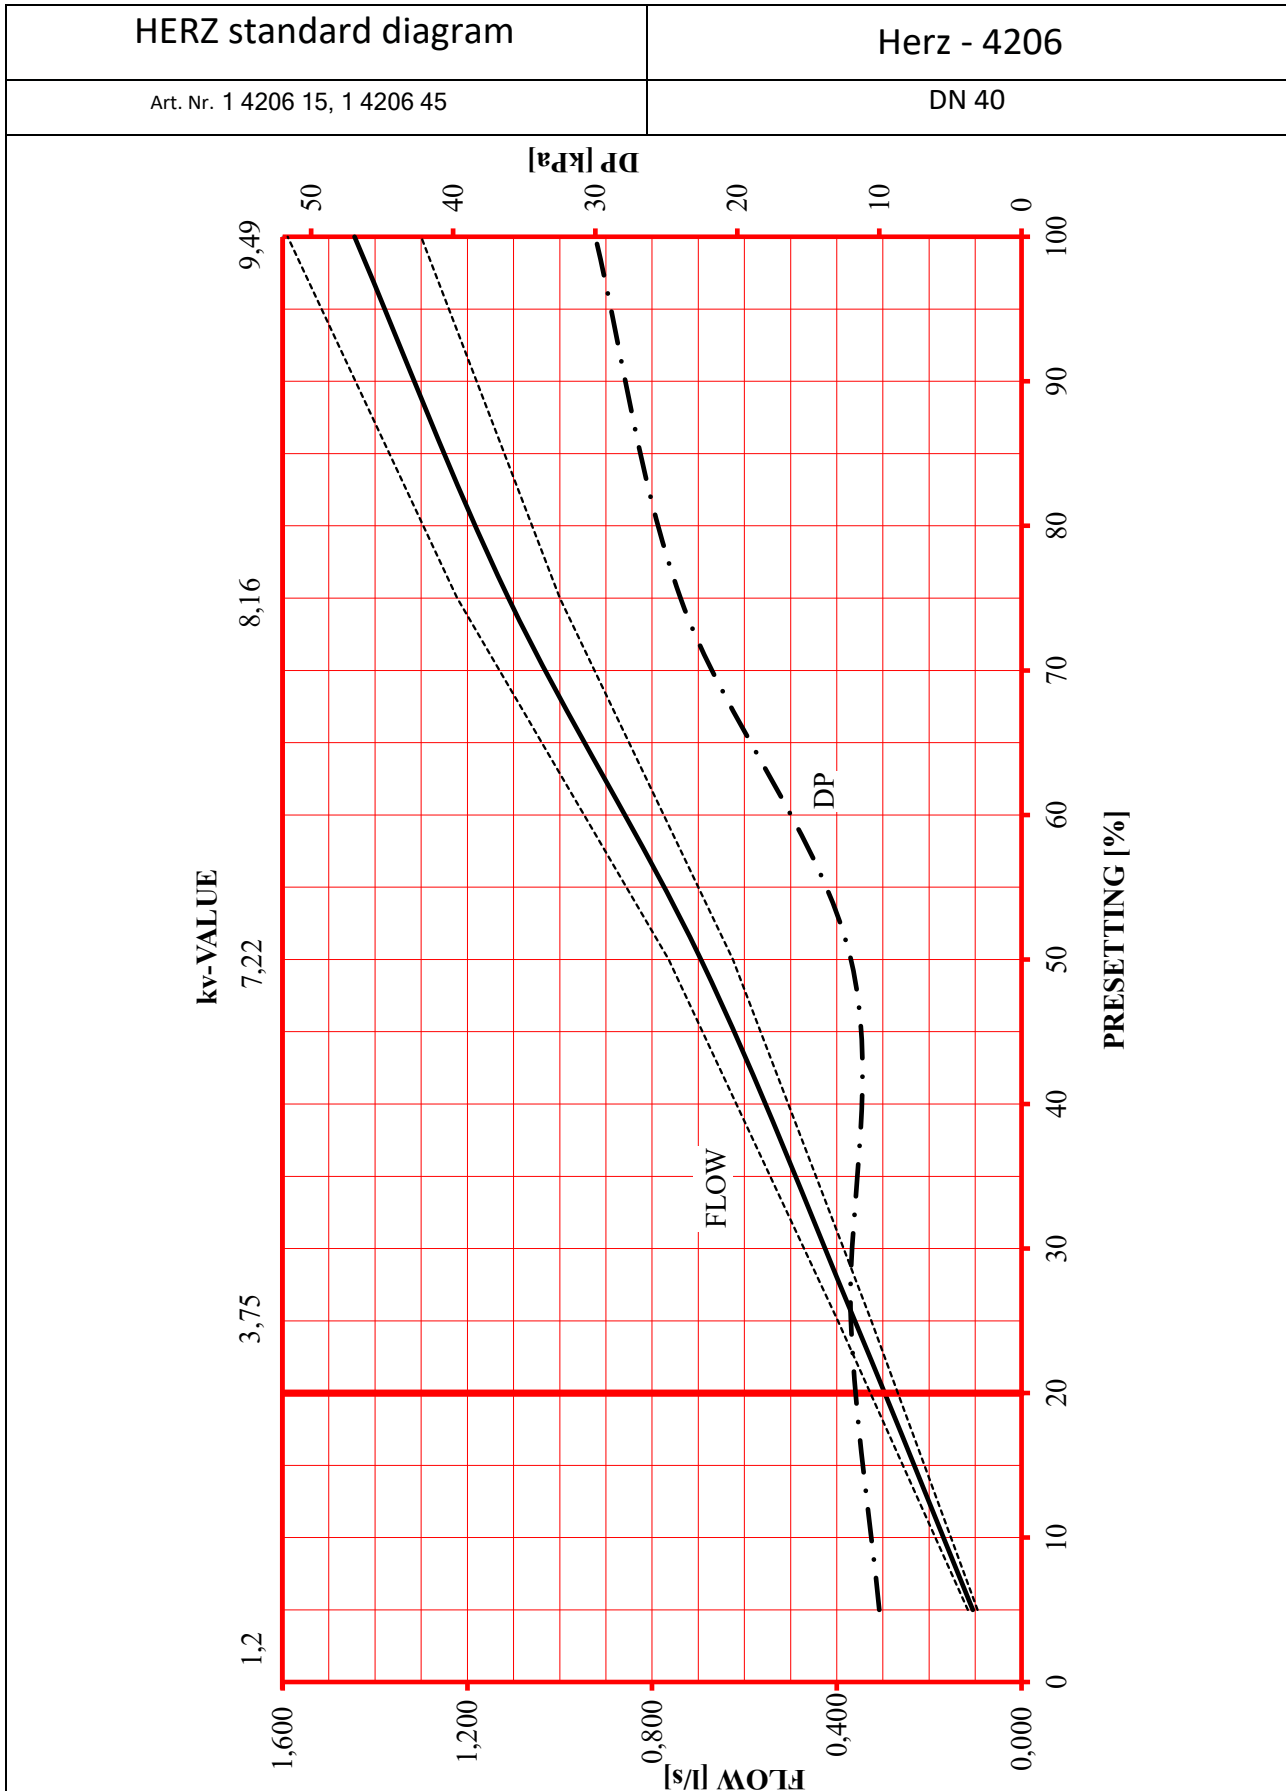

All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.

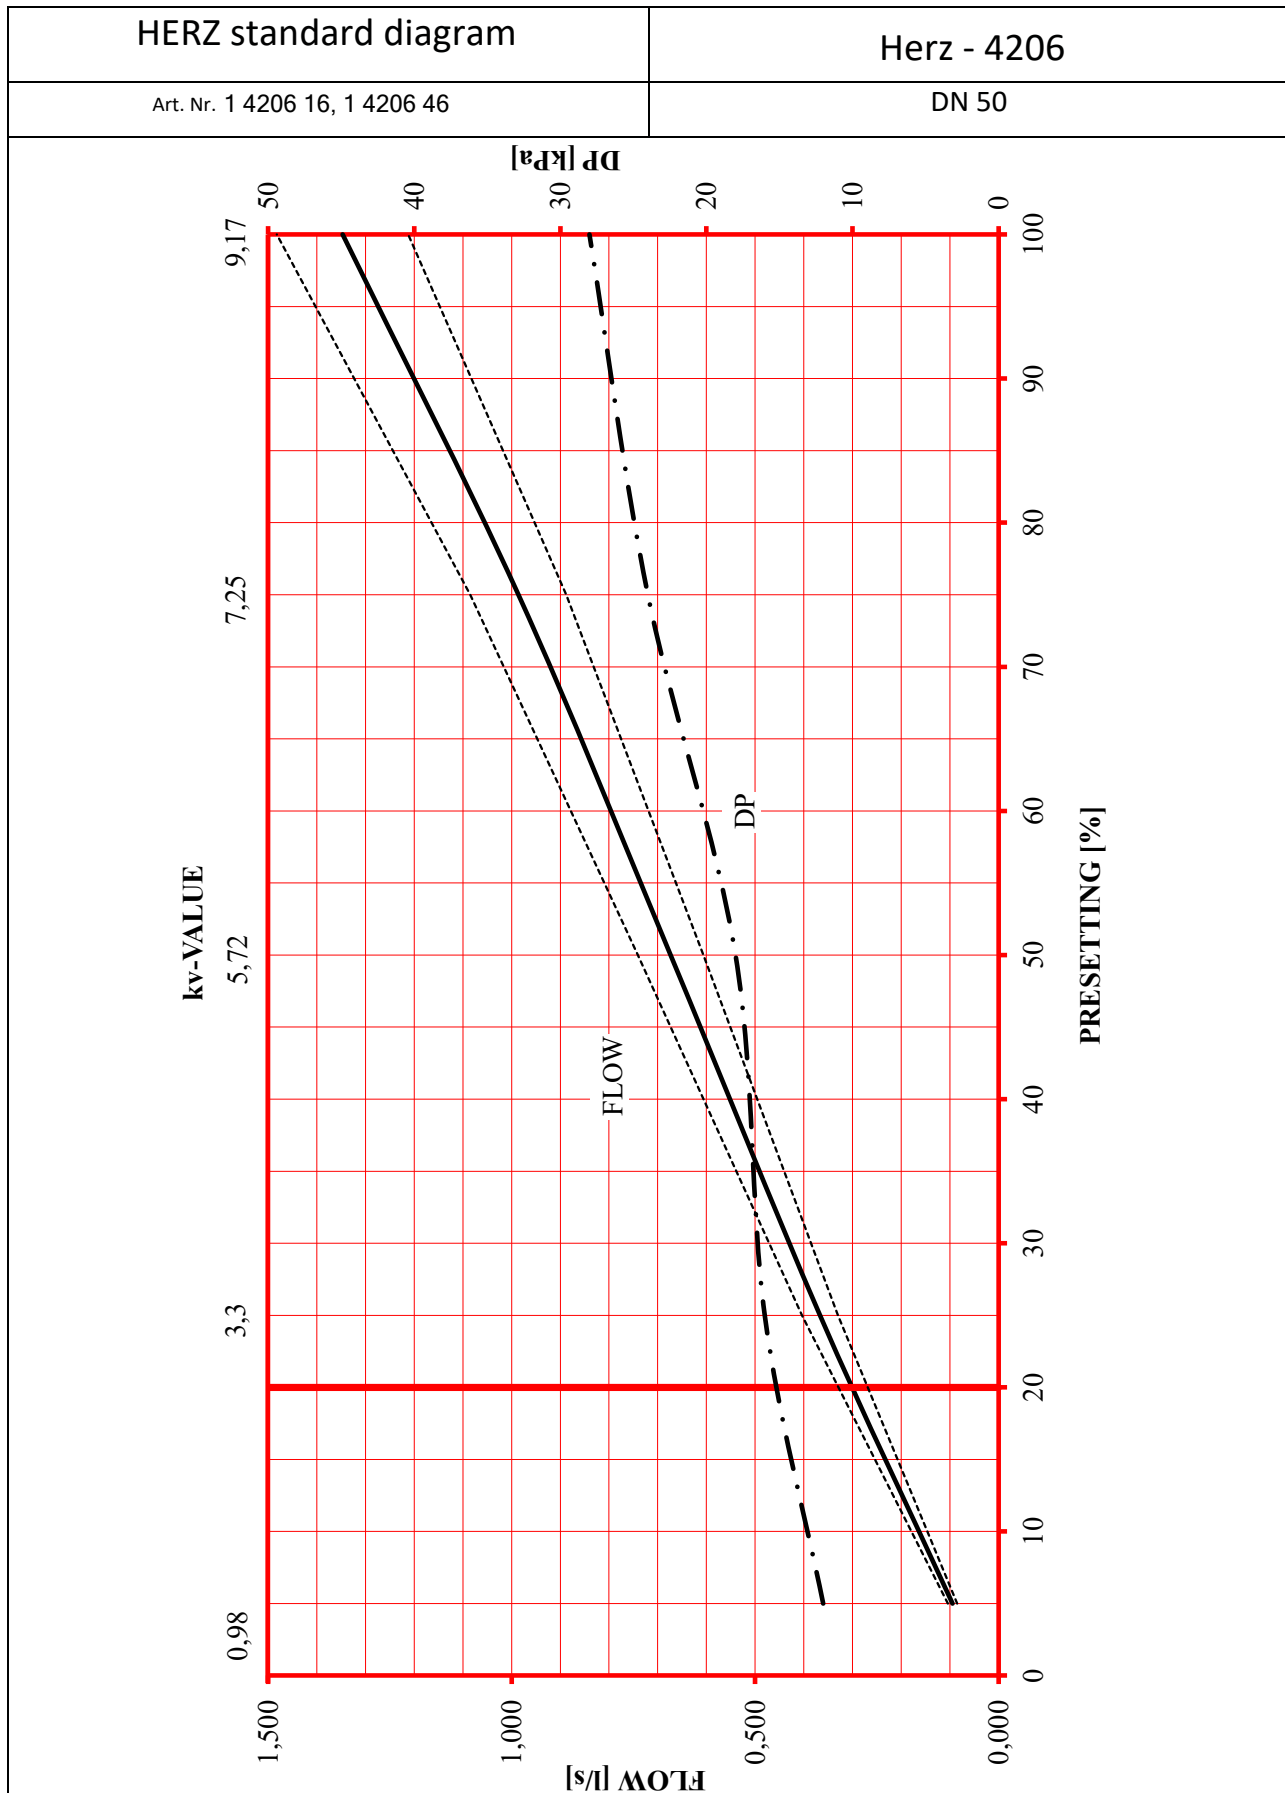

All specifications and information within this document are reflecting the information available at the time of going to print and meant for informational purpose only. Herz Armaturen reserves the right to modify and change products as well as its technical specifications and/or its function according to technological progress and requirements. All diagrams are indicative in nature and do not to be complete. It is understood that all images of Herz products are symbolic representations and therefore may visually differ from the actual product. Colours may differ due to printing technology used. In case of any further questions don't hesitate to contact your closest HERZ Branch-Office.